



for 18 mm board · 4 mm glass
tablero 18 mm · cristal 4 mm

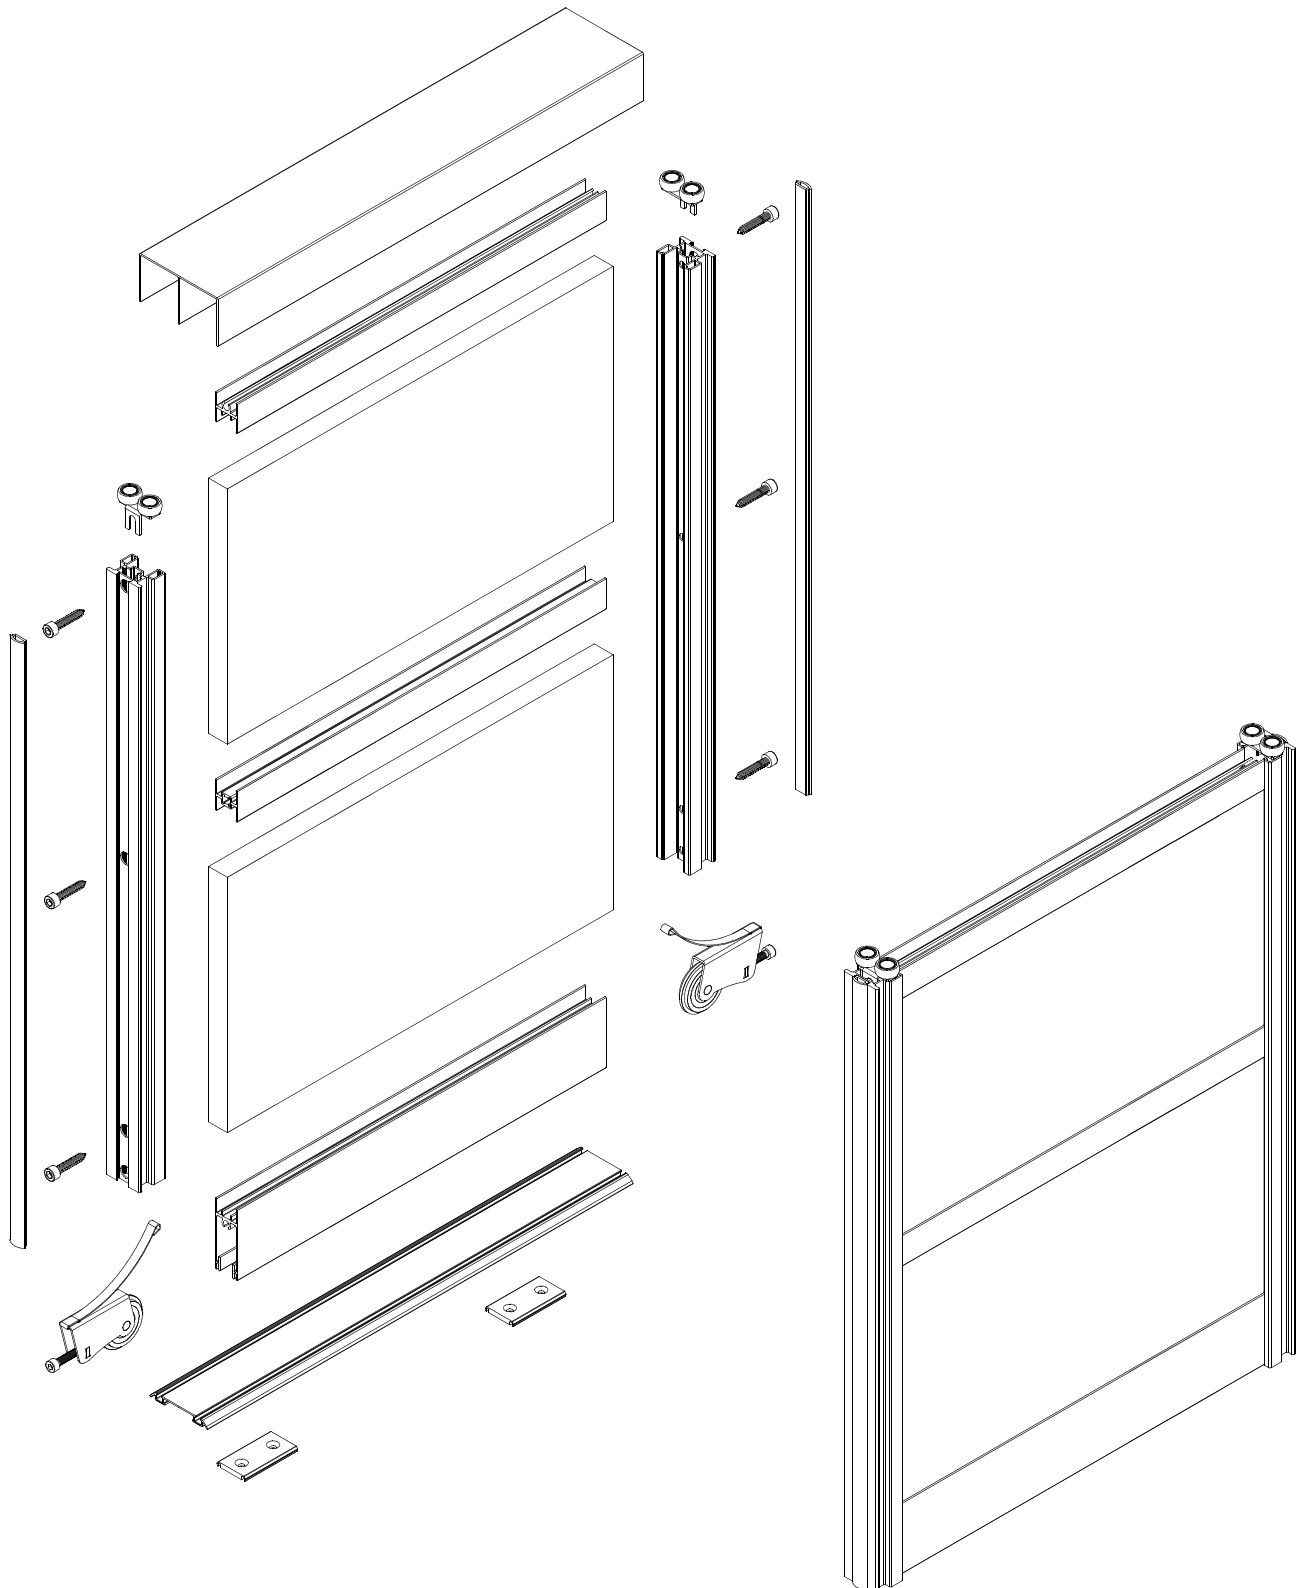


18 mm board · tablero 18 mm

**handle profiles
tiradores**




TR-BASE 25-18

17J260***



TR-BASE S1-18


17I260***



TR-BASE S3-18


17H260***

**horizontal profiles
perfiles horizontales**




RS-BASE 18

17G400***





RC-BASE 18

17F400***



RI-BASE 18

17E400***

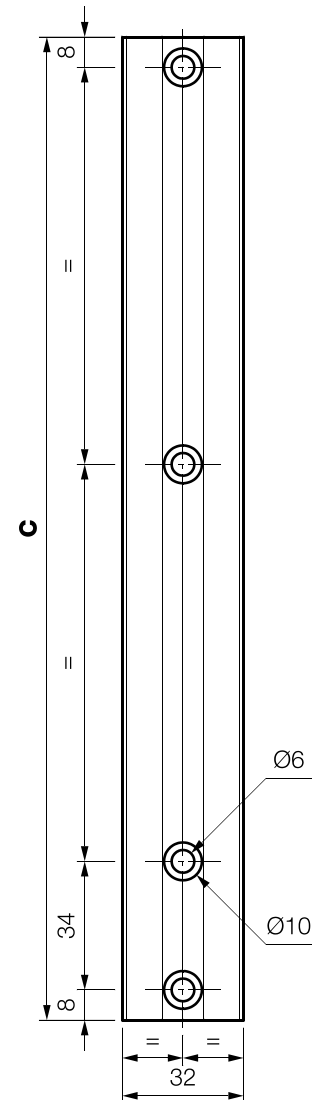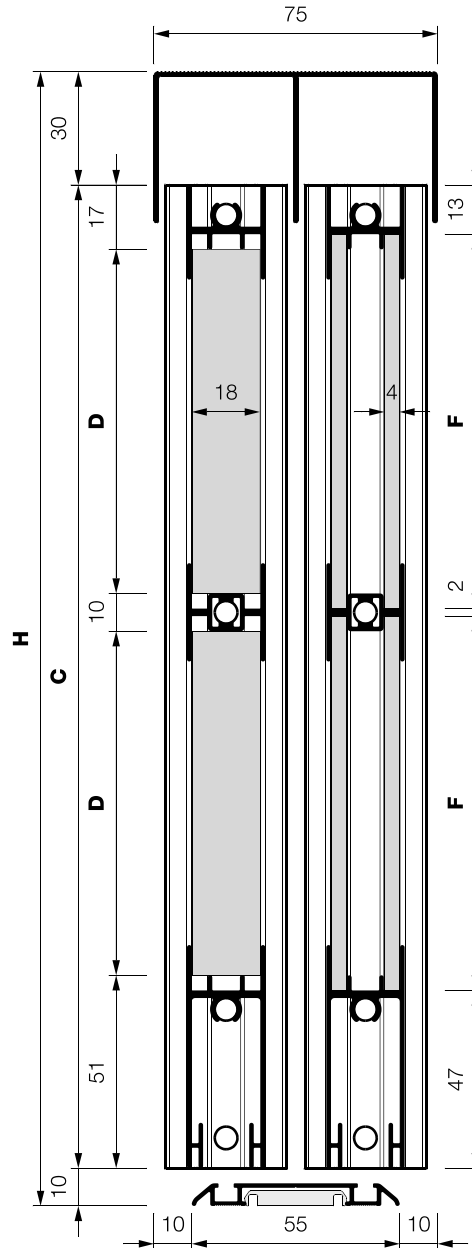

“H” divisions · divisiones “H”

0 div. $D = C - 68 \text{ mm}$

1 div. $D = \frac{C}{2} - 39 \text{ mm}$

2 div. $D = \frac{C}{3} - 29,5 \text{ mm}$

3 div. $D = \frac{C}{4} - 24,5 \text{ mm}$

4 div. $D = \frac{C}{5} - 21,5 \text{ mm}$

5 div. $D = \frac{C}{6} - 19,5 \text{ mm}$

H open area height · alto hueco de luz


C door height · alto de puerta

D board height · alto de tablero

F glass height · alto de cristal

$C = H - 40 \text{ mm}$

$F = D + 8 \text{ mm}$




handle profile drillings
mecanizados tirador


18 mm board · tablero 18 mm

A door width · ancho de puerta
B board width · ancho de tablero




E glass width · ancho de cristal
R horizontal profile · perfil horizontal




TR-BASE 25-18
17J260***

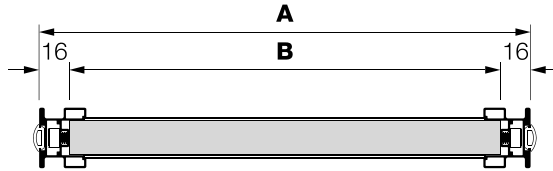




$B = A - 32 \text{ mm}$
 $E = A - 24 \text{ mm}$
 $R = A - 48 \text{ mm}$

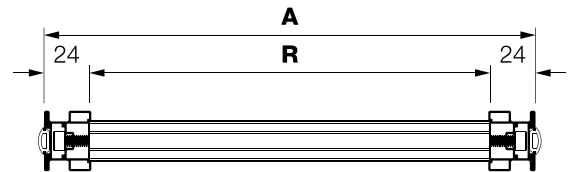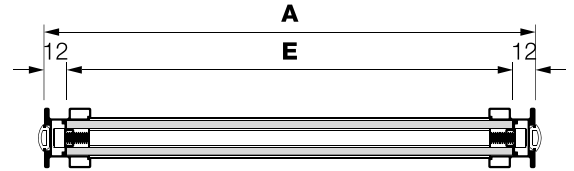


TR-BASE S1-18
17I260***

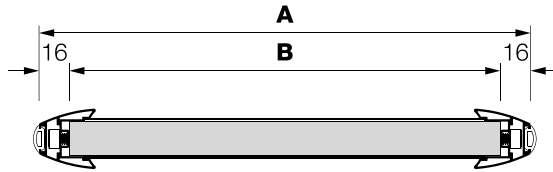



$B = A - 32 \text{ mm}$
 $E = A - 24 \text{ mm}$
 $R = A - 48 \text{ mm}$

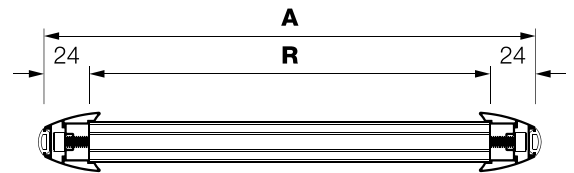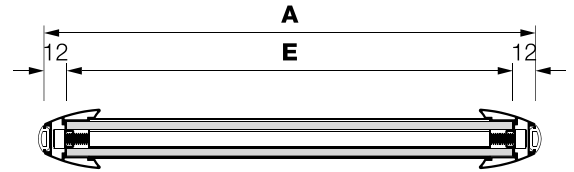

TR-BASE S3-18
17H260***

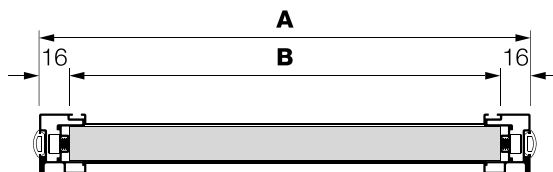

$B = A - 32 \text{ mm}$
 $E = A - 24 \text{ mm}$
 $R = A - 48 \text{ mm}$

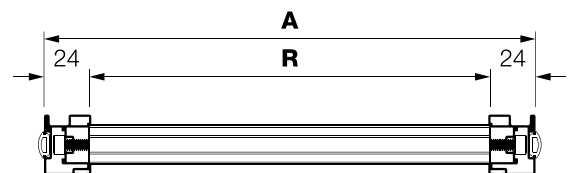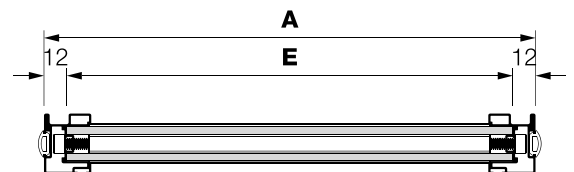


18 mm board · tablero 18 mm

- L** open area width · ancho hueco de luz
A door width · ancho de puerta
B board width · ancho de tablero

TR-BASE 25-18

17J260***



2 doors · puertas	3 doors · puertas	4 doors · puertas
-------------------	-------------------	-------------------

$$A = \frac{L}{2} + 9,5 \text{ mm}$$


$$B = \frac{L}{2} - 22,5 \text{ mm}$$

$$A = \frac{L}{3} + 14,5 \text{ mm}$$

$$B = \frac{L}{3} - 17,5 \text{ mm}$$


$$A = \frac{L}{4} + 9,5 \text{ mm}$$

$$B = \frac{L}{4} - 22,5 \text{ mm}$$

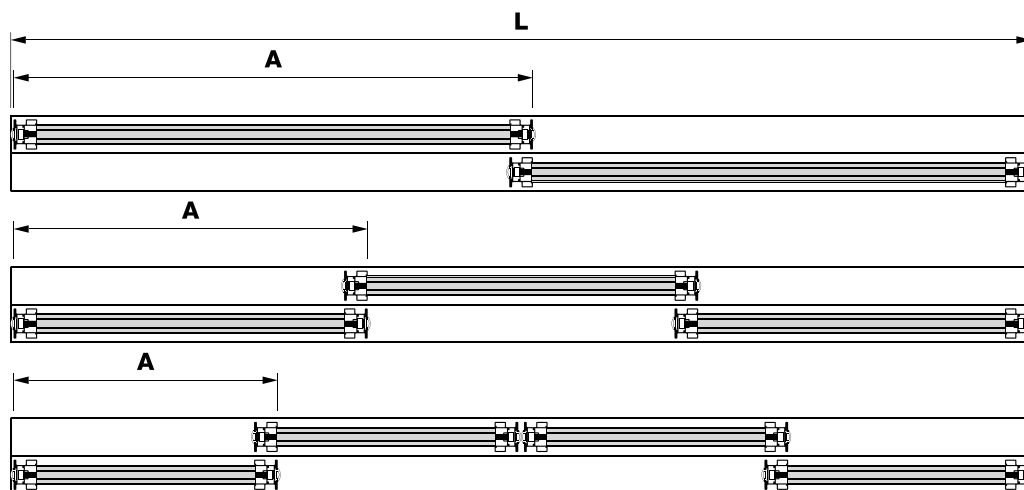

TR-BASE S1-18

17I260***



2 doors · puertas	3 doors · puertas	4 doors · puertas
-------------------	-------------------	-------------------

$$A = \frac{L}{2} + 12 \text{ mm}$$


$$B = \frac{L}{2} - 20 \text{ mm}$$

$$A = \frac{L}{3} + 18 \text{ mm}$$

$$B = \frac{L}{3} - 14 \text{ mm}$$

$$A = \frac{L}{4} + 12 \text{ mm}$$

$$B = \frac{L}{4} - 20 \text{ mm}$$

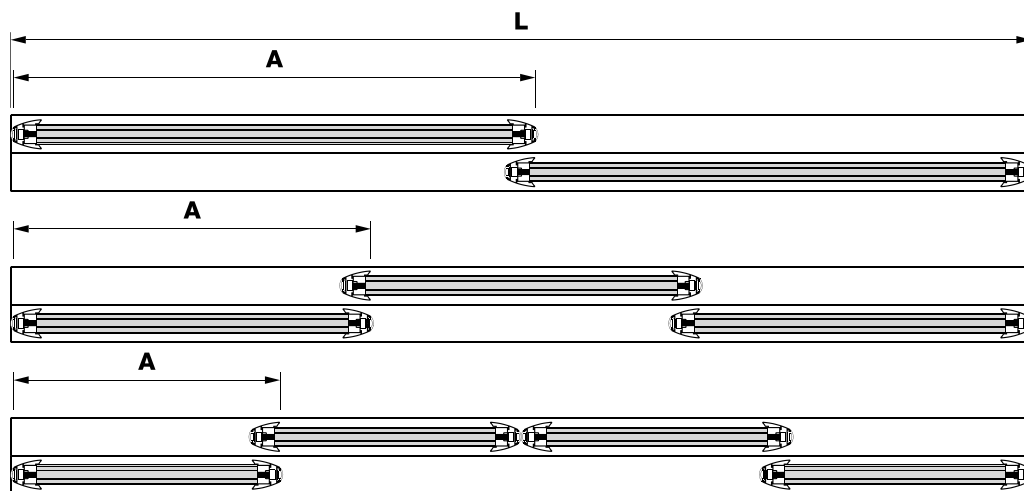


18 mm board · tablero 18 mm

- L** open area width · ancho hueco de luz
- A** door width · ancho de puerta
- B** board width · ancho de tablero

TR-BASE S3-18

17H260***



2 doors · puertas 3 doors · puertas 4 doors · puertas

$$A = \frac{L}{2} + 9,5 \text{ mm}$$

$$B = \frac{L}{2} - 22,5 \text{ mm}$$

$$A = \frac{L}{3} + 14,5 \text{ mm}$$

$$B = \frac{L}{3} - 17,5 \text{ mm}$$

$$A = \frac{L}{4} + 9,5 \text{ mm}$$

$$B = \frac{L}{4} - 22,5 \text{ mm}$$

